

LP6 LED PAD

6-LED LIGHT HEAD (Surface Mount)

12~24 VDC



FEATURES

- Super low profile for discreet mounting.
- Self-Adhesive backing for quick simple mounting.
- Multi-Voltage Input 12~24VDC.
- Built-in 23 selectable flash patterns.
- LEDs rated to 100,000 hours of operation.
- Non-volatile memory recalls last flash pattern used at power up.
- Multiple units are synchronizable and can flash simultaneously or alternately.
- Reverse polarity protection.
- Weatherproof and vibration resistant design for external or internal use.

SPECIFICATIONS

Meets: SAE J595 Class 1, CA13 Class B

Bulb: High-power LED x 6pcs

Warning Patterns: 23 Flash Patterns

Operating Voltage: 12~24VDC

Avg. Current: 0.25A @12VDC / 0.125A @24VDC
(varies with flash pattern)

Avg. Power: 3 Watts (varies with flash pattern)

Max. Current: 0.5A @12VDC / 0.25A @24VDC

Max. Power: 6 Watts

Wires: WhiteVcc : 20cm (24AWG)

Black-GND : 20cm (24AWG)

Brown-Flash Patterns & Sync : 20cm (24AWG)


Fuse Recommended: 1A

Multi-Unit Synchronization: Over 15 units

Available in: RED , BLUE , AMBER , WHITE

Warranty: 2 year.

DIMENSIONS

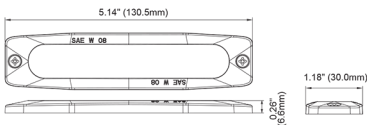

PART NO.

- M45-LP6-AC (AMBER)
- M45-LP6-BC (BLUE)
- M45-LP6-RC (RED)
- M45-LP6-WC (WHITE)

FLASH PATTERN

FP#	Flash Patterns	
1	Single (2Hz)	13 Single H/L (split)
2	Double (2Hz)	14 Single (all) (SAE)
3	Triple (2Hz)	15 Double (all) (SAE)
4	Quad (2Hz)	16 Quad (all) (SAE)
5	Random	17 Quint (all) (SAE)
6	Single (split)	18 Mega (all)
7	Double (split)	19 Ultra (all) (SAE)
8	Quad (split)	20 Single-Quad (all)
9	Quint (split)	21 Single H/L (all)
10	Mega (split)	22 Steady Half
11	Ultra (split)	23 Steady All
12	Single-Quad (split)	

*SPLIT=Left alternate Right

*ALL = Simultaneous

Mounting Brackets

97.M45001.00
L-BRACKET SINGLE HEAD

97.M45002.00
BRACKET SWIVEL MOUNT

